

* 48 7/8"

2" HOLE IN SHELF (TYP 2)

* MODEL 9664SL- 93 7/8"x63"

A


PLAN VIEW (N.T.S.)

DOORS AVAILABLE BOTH SIDES-SUFFIX DSL
 CASHIER WINDOW AVAILABLE
 IN SLIDING DOOR-SUFFIX CSL

NOTE : BUILDING HEIGHT WITHOUT EXTERIOR ROOF- 86 9/16"

B

ELEVATION A

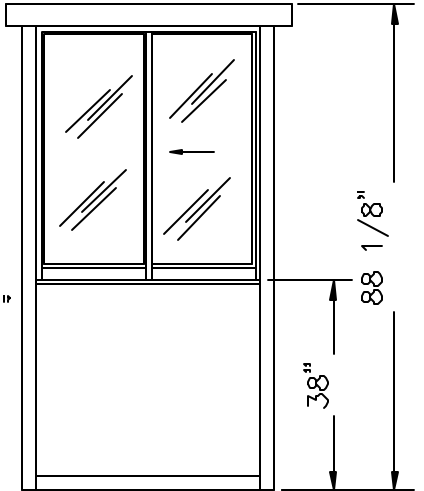

ELEVATION B

STANDARD ITEMS FOR A 9648SL DURALUMINUM BUILDING

- ① — 100 AMP SINGLE PHASE 12 CIRCUIT MAIN LOAD CENTER
- ② — 115V DUPLEX, 230V OUTLET
- ③ — 40 WATT LIGHT FIXTURE
- ④ — 22" DEEP SHELF
- ⑤ — 3" OVERHANG EXTERIOR ROOF (OPTIONAL)
 (REFER TO DURALUMINUM SPECIFICATIONS FOR TYPICAL CONSTRUCTION)

PORTA-KING BUILDING SYSTEMS

4133 SHORELINE DRIVE EARTH CITY, MISSOURI 63045
 1-800-456-5464 FAX 314-291-2857 www.portaking.com

TITLE	DURALUMINUM MODEL 9648SL
-------	--------------------------